



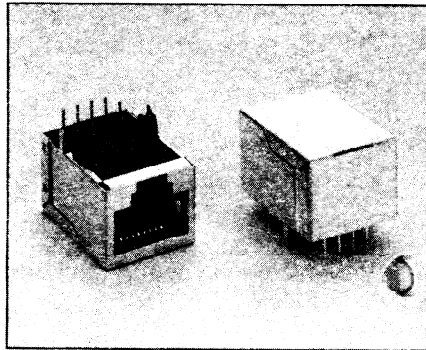

# 6012-S

PCB Jack, Side Entry, Shielded

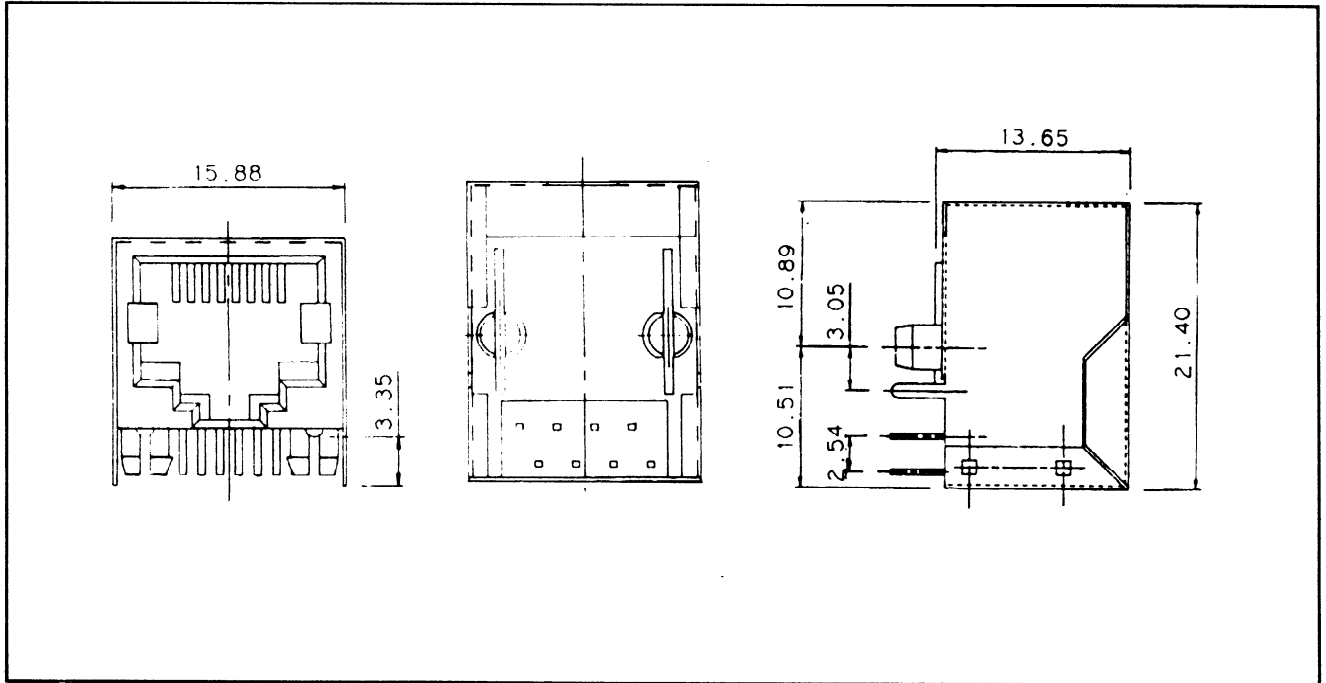

## Features

- \* Industry Standard Phone Jacks with stress relieve mounting pegs.
- \* Material : Glass Filled Polyester, UL 94V-0  
Black
- \* Contact : 0.35 mm thick C5210 Alloy  
0.25mm thickness Tin Plated Copper  
Selective Gold Plating On Contact  
Standard Thickness : 5 micro-inch over Nickel Base  
Other Thickness contact Sales

## Order Information

6012-01S