



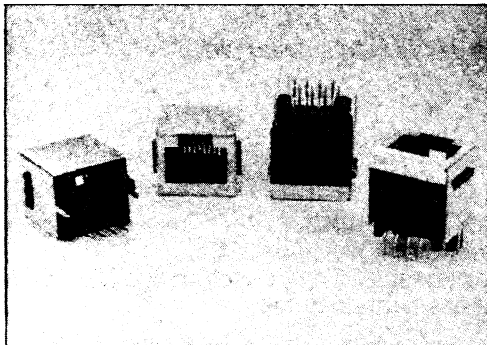

# 6017-S

Top Entry, Shielded

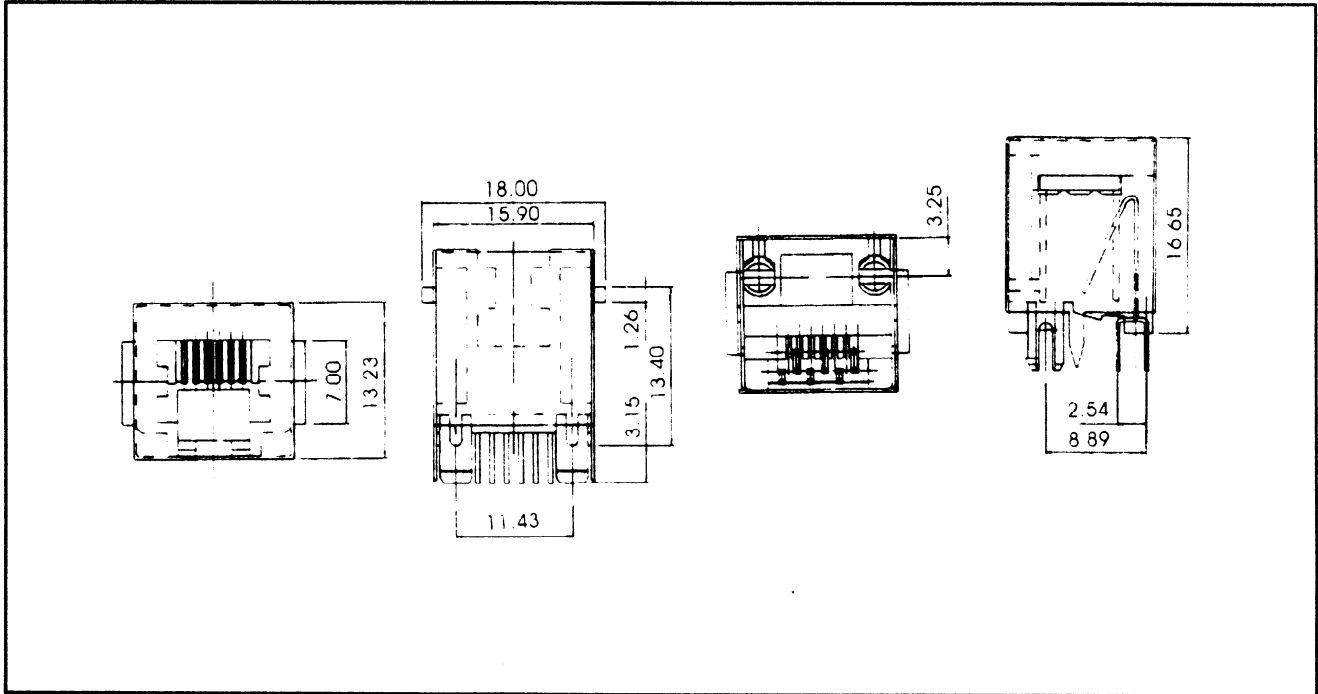

## Features

- \* Industry Standard Phone Jacks with stress relieve mounting pegs.
- \* Material : Glass Filled Polyester, UL 94V-0  
Black
- \* Contact : 0.35 mm thick C5210 Alloy  
0.25 mm thick Tin Plated Copper  
Selective Gold Plating On Contact  
Standard Thickness : 5 micro-inch over Nickel Base  
Other Thickness contact Sales

## Order Information

6017-0808-S